



The Sanicondens is a small pump used to pump condensate from condensing boilers, HVAC systems, water heater systems, etc. The Sanicondens will pump condensate waste up to 15 feet in height and/or 150 feet away from a soil stack.




- Discharges the condensate waste through a 3/8" vinyl tube. A non-return valve is included on the discharge connection provided with the system.
- The small, powerful pumping unit can be floor or wall mounted. It comes with provisions for a **ready-to-wire connection to an external overflow switch** that will shut down the appliance or alert the consumer in the event of overflow. It also includes all necessary hardware for ease of installation; **20 ft. of vinyl tubing, inlet adapter, discharge adapter.**
- Discharges condensate from a condensing boiler or other condensate producing fixtures. The condensate will drain into the system via **two 1" inlets located on top of the enclosure.**



TECHNICAL SPECIFICATIONS	
Pump type:	Condensate pump
Electrical:	120 V – 60 Hz / 1.5 Amps (Max)
Motor:	1/30 HP oil-filled thermally protected motor
Operating Temperature:	160°F Max.
Power cord length:	60 inches
Noise level:	≤ 44 dBA (Lp) (measured at 3 ft.)



Discharge pipe diameter: $\frac{3}{8}$ "
 Discharge rate at 15 ft: 30 GPH
 Discharge rate at 3 ft: 86 GPH
 Normal running time: 3-5 seconds (short bursts)
 Capacity: 0.5 gallons
 Inlets: 1" (top)
 Method of activation: Float/microswitch
 Weight: 7 lbs.
 Certifying agencies: CSA (IPC, NSPC)
 Connections: Condensing boiler, HVAC systems,
 air conditioners

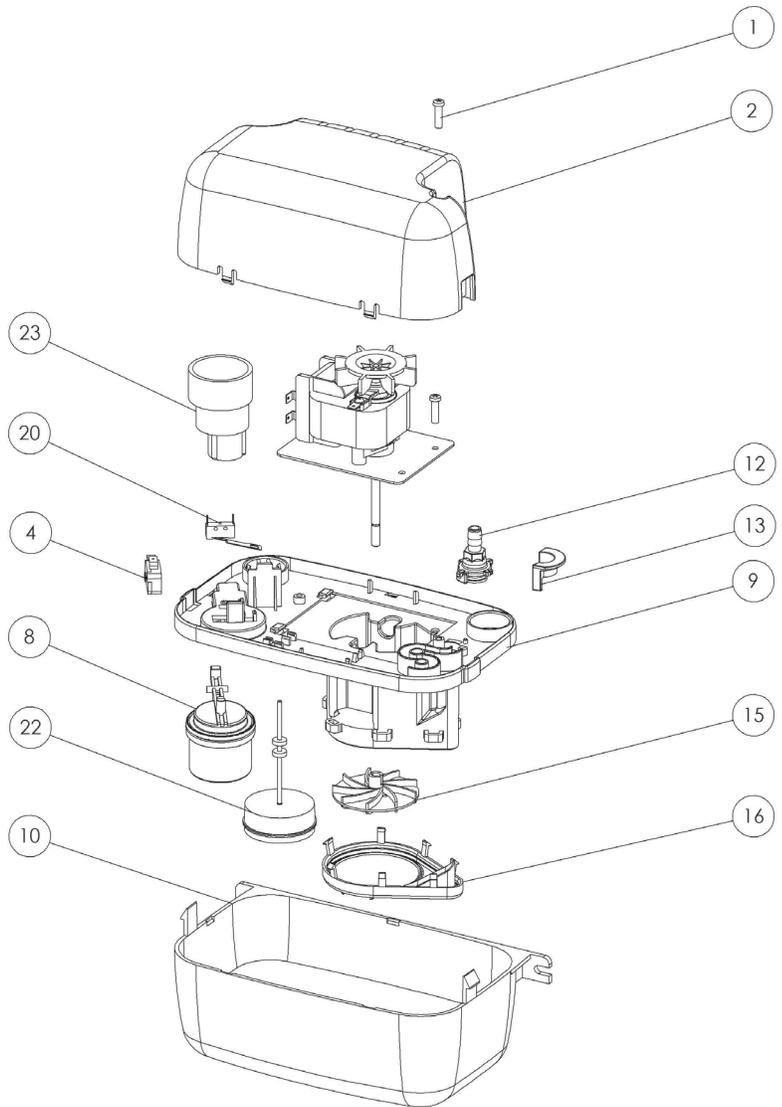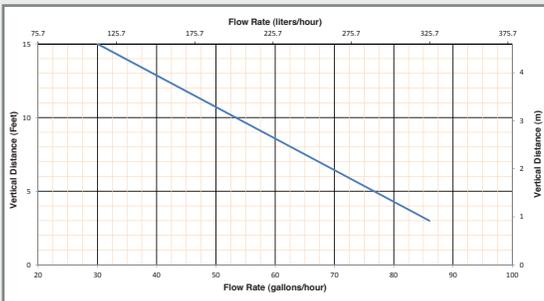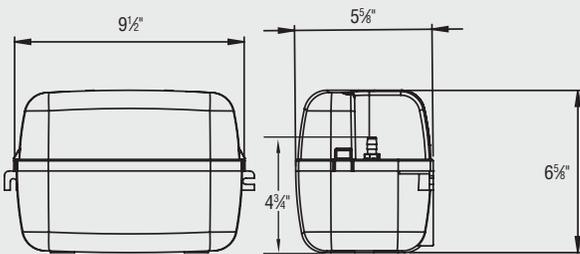


PLEASE CALL US TOLL-FREE AT 800-571-8191 (US) / 800-363-5874 (CDN)
 TO PURCHASE PARTS REFERENCED ABOVE

AN EASY SOLUTION TO PUMP CONDENSATE AWAY FROM CONDENSING BOILERS AND AIR CONDITIONERS

One of the **most powerful and quiet condensate pumps** on the market with features that no competitor can match.

The two quart capacity condensate pump comes equipped with **all the necessary hardware for easy installation**. It can be installed on top of a flat surface or mounted on a wall.

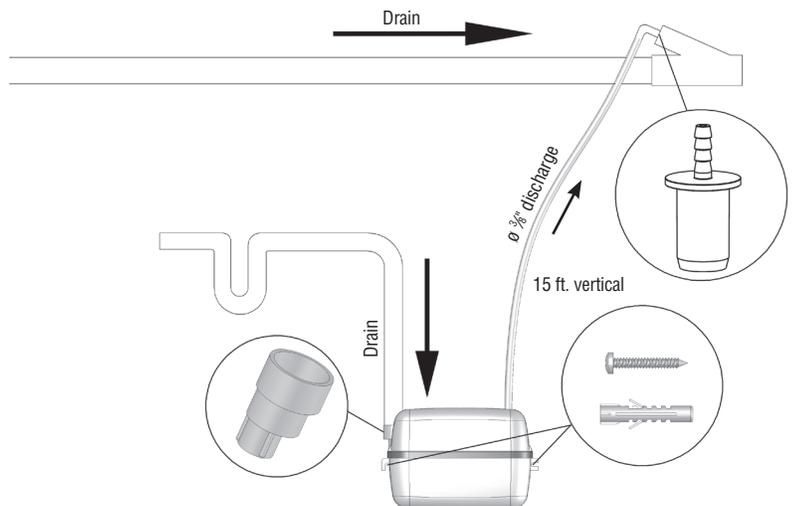

FOR ADDITIONAL TECHNICAL QUESTIONS, PLEASE CALL 800-571-8191